

All power tools can be dangerous if both general and tool specific safety instructions are not followed carefully. General safety instructions apply to all power tools, both corded and cordless.

## Start with a Safe Work Area



Keep your work area clean and well lit. Cluttered benches and dark areas invite accidents.



Do not operate power tools in explosive atmospheres, near flammable liquids, gases, or dust. Power tools create sparks, which may ignite the dust or fumes.

- Keep bystanders, children, and visitors away when using a power tool. Distractions can cause you to lose control.



## Electricity can be Dangerous

Grounded tools (three pronged cords) must be plugged into a properly grounded installed outlet. Never remove or cut off the grounding prong or modify the plug in any way. Do not use any adapter plugs.



Double Insulated tools have a polarized plug (one blade is wider than the other.) This plug will fit into an outlet only one way. Do not change the plug in any way.



Do not use AC only rated tools with a DC power supply.



Store battery packs away from other metal objects like paper clips, coins, keys, nails, screws, or other small metal objects. These things can make a connection from one terminal to the other, shorting the battery terminals together and causing burns or fire.



- When using a power tool, don't touch grounded surfaces such as pipes, radiators, ranges and refrigerators. There is a higher risk of electric shock if your body is grounded.

## GFCI

In damp locations, only plug your tool into a Ground Fault Circuit Interrupter (GFCI). If the work area does not have a permanent GFCI on the outlet, use a plug-in GFCI. Wear rubber gloves and footwear.



Don't use or leave power tools in the rain or wet conditions.



Do not abuse the cord, carry the tool by its cord, or pull the cord to unplug it. Keep the cord away from heat, oil, sharp edges or moving parts. Replace damaged cords immediately.



Always hold the tool by the insulated gripping surfaces. Contact with hidden wiring or its own cord will make exposed metal parts of the tool "live" and shock the operator.

## Rules about Extension Cords

- When using a power tool outside, use an extension cord marked for outdoor use with "W-A" or "W". These cords are made for outdoor use.
- Extension cords with 3-prong grounding plugs must be plugged into 3-prong outlets when using grounded tools.
- Replace damaged or worn cords immediately.

## Amps

The wire gauge and length of the extension cord must be able to handle the amps of the tool. Find the Amps (A) on the tool's nameplate and use the chart to determine the necessary wire gauge for your extension cord length.

Nameplate Amps	Extension Cord Gauge			
	Cord Length in Feet			
	25'	50'	100'	150'
0-6	18	16	16	14
6-10	18	16	14	12
10-12	16	16	14	12
12-16	14	12	Not Recommended	

## Good Personal Safety is a Must

Following good safety practices when using all power tools is a must. Make a habit of including safety in all of your activities.



Always read and understand the tool's operator's manual, tool markings and the instructions packaged with the accessory before starting any work.

- Stay alert, watch what you are doing and use common sense when using a power tool.



Do not use tools when you are tired or under the influence of drugs, alcohol, or medication.

- Dress right. Do not wear gloves, loose clothes or jewelry. Contain long hair. Loose clothes, gloves, jewelry, or long hair can be caught in moving parts.
- Keep handles dry, clean and free from oil and grease.
- Be sure the power tool's switch is OFF before plugging it in or inserting a battery pack. Do not carry tools with your finger on the switch.



Remove adjusting keys and wrenches before turning the tool ON.

- Always keep a firm footing when using power tools. Be sure you have balance and control before you start the job.



Use safety equipment. Always wear eye protection. A dust mask, non-skid safety shoes, hard hat, or hearing protection must be used when needed. The reference to “safety goggles” or “safety glasses” in product specific sections provides potential options - always refer to the tool’s operator’s manual for the specific eye protection recommended, which should be marked as complying with current national standards.

- Unplug tool/remove battery before changing accessories.



Keep hands away from rotating or moving parts.

### Do the Job Safely

- Use the power tool accessories only for the jobs for which they were designed.



Secure and support the workpiece. Use clamps and a stable work surface. Do not hold the work by hand or against your body.

- Keep guards in place and working properly.
- Do not force the tool. Use the right tool for your job. It will do the job better and safer.
- Use only accessories recommended by the tool manufacturer. Accessories that may be suitable for one tool may become hazardous when used on another tool.



Do not touch the drill bit, blade, cutter or the workpiece immediately after operation; they may be very hot and may burn you.

- If a method of dust collection is available with the power tool, it should be used to reduce the risk of dust-related hazards.

### Maintenance Keeps Tools Working Safely and Effectively

- Do not use a tool if the switch does not turn it on and off. It must be repaired.



Look at the tool before using it. Are moving parts misaligned or binding? Is anything broken? Damaged tools must be fixed before using them. Develop a maintenance schedule for your tool.

- Maintain accessories carefully. Keep blades and bits sharp and clean.
- Take your tool to be serviced by qualified repair people. Service or maintenance performed by unqualified personnel could result in a risk of injury. For example: internal wires may be misplaced or pinched, safety guard return springs may be improperly mounted.
- When servicing a tool, use only identical replacement parts. Follow instructions regarding maintenance in the tool’s operator’s manual. Use of unauthorized parts or failure to follow the maintenance instructions may create a risk of electric shock or injury.
- Clean and lubricate a tool only as directed in its operator’s manuals. Certain cleaning agents such as gasoline, carbon tetrachloride, ammonia, etc. may damage plastic parts.
- Maintain labels and nameplates. These carry important information. If unreadable or missing, contact the manufacturer for a replacement.

### When Done, Store the Tools out of Harm’s Way



To avoid accidental starting, unplug the cord, remove batteries or lock off the switch when the tool is not being used, when changing accessories, and when adjusting or cleaning tools.

- Keep tools out of the reach of children and people unfamiliar with the tools.

## Wood Lathes

Safe, effective use of a wood lathe requires detailed study and knowledge of all procedures for using this tool.

### Good Personal Safety is a Must

Following good safety practices when using wood lathes is a must. Make a habit of including safety in all your activities.



Always read and understand the tool's operator's manual, tool markings and the instructions packaged with the accessory before starting any work.



Always wear safety goggles or safety glasses with side shields complying with current national standards, and a full face shield when needed.



Use the appropriate mask or respirator in dusty work conditions.

Wear proper hearing protection, as needed.

- Dress right. Do not wear gloves, loose clothes or jewelry. Contain long hair. Loose clothes, gloves, jewelry, or long hair can be caught in moving parts.
- Crowded, cluttered work areas that can cause tripping or loss of balance are particularly dangerous.
- Do not use the tool until it is completely assembled and installed according to the manufacturer's instructions. Check adjustments often.

### Choose the Right Tools

Choosing the correct tool and the proper accessory for your job can help to reduce the risk of serious injury. When used according to the manufacturer's instructions, the proper tool and accessory will do the job safer and faster.

- Check the operator's manual for proper speed recommendations for the intended purpose and use.
- A lathe should not be altered in any way, or set up to perform any operation not covered in the operator's manual.
- Keep accessories sharp. Dull accessories can dig into the wood, causing the workpiece to be thrown.

### Know your Workpiece

- Use only defect-free stock, without cracks, checks, knots and splits. Knots, for example, can fly out and cause serious injury.
- It is recommended that you rough out faceplate workpiece on a band saw or with hand tools before installing them on the lathe faceplate to prevent jams, slips, or thrown workpieces.
- Never remount a turned piece once it is removed from the faceplate.


### Before Cutting...

- Make certain that the belt guard or cover is in place and the workpiece is free but firmly mounted between centers. Check that all clamping devices (locks), such as on the tailstock and tool rest, are tight and that the workpiece clears the tool rest and other machine parts before operating the tool.



Do not run a lathe in the wrong direction. This can cause the turning tool to be thrown from your hands. The lathe spindle must rotate so the top of the workpiece turns toward you.

- The clearance between the workpiece and the tool rest should be only about 1/8". Rotate the workpiece by hand to be sure it clears the tool rest.




- Remove the tool rest before you sand a workpiece by hand.
- Clear the lathe bed of all objects before turning on the tool.

### While Cutting ...

- Never adjust the tool rest with the lathe turned on.

- Hold turning chisels securely on the tool rest, and hold the handle of the chisel firmly.

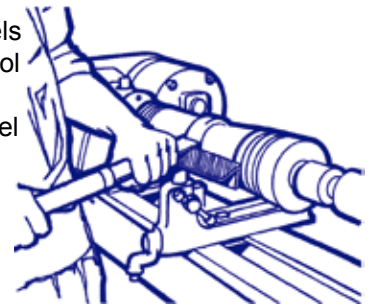

- Always use the lowest speed when starting a new workpiece.

Lathes should be operated at slow speeds until the workpiece is cylindrical. This helps avoid the possibility of an unbalanced piece jumping out at high speed and striking the operator.

- Clamp workpieces securely. Check frequently to be sure clamps remain secure. A moving workpiece can cause loss of control and result in injury.

### When Done...



Unplug the lathe and lock the switch when not in use. Make sure the switch is in the off position to prevent accidental start-up.

Clean and store the tool in a safe, dry place.